

ALASKA 6

ice cream and
frozen products

FEATURES

-  negative temperature
-  10" Monitor
-  payments system setup
-  6 lanes modular shelves
-  break-proof glass
-  internal LED lighting
-  internal elevator

TEMPERATURE FOR EVERY NEED

The robust thermal insulation and cooling system set the vending machine to the desired negative temperature. Suitable for all types of frozen products, such as ice cream, ready meals, or packaged pizzas.



ALASKA 6
W - 1048
H - 1995
D - 795



REAL-TIME DATA SERVICE

Magex provides a vending machine real-time management service, thanks to our web-based interface accessible from virtually any kind of device.


You can check real-time selling statistics, stock status, actual stock for every currency denomination.

You will be able to monitor the internal temperature and visualize it in a chart.

USER EXPERIENCE

Quad-Core CPU 10" touchscreen panel, 1920x1080 full HD for an e-commerce-like user experience.

The screen provides a menu where the consumer can browse product descriptions, promotional images and videos.

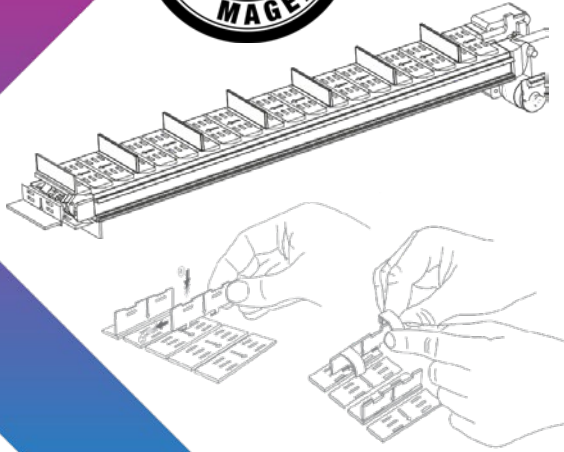

PATENTED DISPENSING SYSTEM





Magex vending machines boast unprecedented flexibility in managing very different items.

Our Conveyor patented dispensing system fits any kind of product, also combining adjacent lanes to move larger products.

End-user can easily customize lanes setup to manage effectively any size and shape item to sell.


Moreover, interlocking partitions keep items separate into the same lane.

Our advanced multi-function self-diagnostic tool performs a continuous system health check, starting from lanes operation status before each delivery up to a full system reboot if needed.

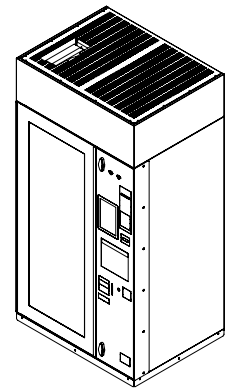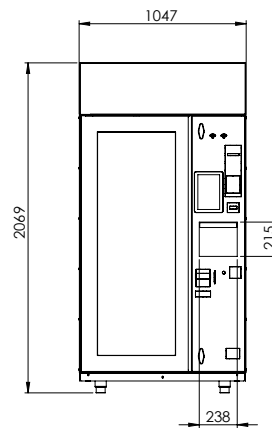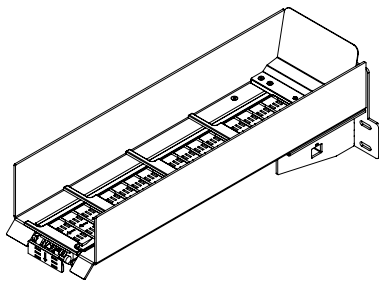

DELICATE DISPENSING

An internal elevator with a sliding belt retrieves the products and gently moves them towards the pickup compartment located below the monitor. Magex vending machines are designed especially for delicate products of any shape, such as artisanal ice cream or semifreddo.



■ showcase products ■ touch screen ■ withdrawal area

DATA SHEET

Width	1047 mm
Height	2069 mm
Depth	795 mm
Withdrawal area	238x215 mm
Max number of shelves	8
Shelf lanes	6
Minimum temperature	-25 °C
Lift dimensions	510x150 mm
Screen size	10"
Consumption	700W
Weight	330 Kg
Voltage supply	230V/50Hz 110V/60Hz



TECHNICAL FEATURES

- Reinforced pickup compartment
- Gas-filled thermic anti-vandalism glass
- Console with independent opening
- Reinforced steel frame
- 10" and 22" HD monitors
- Dual-core industrial computer
- Operating system installed on 32GB solid-state drive
- Insulated showcase door
- LED lighting
- Configurable shelves in height, depth, and number of selections
- Armored console locks
- Self-diagnostic fault finding system
- Standard multi-control electronics
- Data management and statistics display system
- Pickup and delivery product elevator
- Temperature control with recording
- Foot cover guard



video

OPTIONAL

- Banknote reader
- Banknote reader with change giver
- Coin reader with tube change giver
- Item insertion via barcode
- Graphic customization
- RFID loyalty card system
- Printer
- Outdoor cover
- Credit card/debit card reader
- Speaker kit
- Lexan protective door

